

ANEXOS

Headquarters

International Corporate
Headquarters
Tel: +1 732 641 6332
Email: corporate@alvarion.com

North America Headquarters
Tel: +1 850 314 2500
Email: northamerica@alvarion.com

Sales Contacts

Latin America & Caribbean
Email: latam@alvarion.com

Australia
Email: australia@alvarion.com

Brazil
Email: brazil@alvarion.com

China
Email: china@alvarion.com

China Republic
Email: china@alvarion.com

France
Email: france@alvarion.com

Germany
Email: germany@alvarion.com

Hong Kong
Email: hongkong@alvarion.com

Italy
Email: italy@alvarion.com

Ireland
Email: ireland@alvarion.com

Japan
Email: japan@alvarion.com

Mexico
Email: mexico@alvarion.com

Nigeria
Email: nigeria@alvarion.com

Philippines
Email: philippines@alvarion.com

Poland
Email: poland@alvarion.com

Romania
Email: romania@alvarion.com

Russia
Email: russia@alvarion.com

Singapore
Email: singapore@alvarion.com

South Africa
Email: southafrica@alvarion.com

Spain
Email: spain@alvarion.com

U.K.
Email: uk@alvarion.com

Uruguay
Email: uruguay@alvarion.com

For the latest contact information in your area, please visit
www.alvarion.com/companylocations



www.alvarion.com
We're on your wavelength.

© Copyright 2012 Alvarion Ltd. All rights reserved.
All other trademarks are the property of their respective owners. For complete terms and conditions, please refer to the back of this document.

Specifications

radio	
Frequency	4.300 - 3.100 GHz, 5.15 - 5.35 GHz, 5.47 - 5.725 GHz, 5.725 - 5.850 GHz
Radio access method	Time Division Duplex (TDD)
Channel	10 MHz, 20 MHz
Central frequency resolution	5 MHz, 10 MHz
Max output power (at antenna port)	AU: -10 dBm to 21 dBm, automatically adjusted by ATPC SU: -10 dBm to 21 dBm, automatically adjusted by ATPC Actual max power may be limited for compliance with local regulation
Sensitivity, typical (dBm at antenna port)	Modulation 1 2 3 4 5 6 7 8 Level* (20 MHz) -89 -88 -86 -84 -81 -77 -73 -71 Level* (10 MHz) -92 -91 -89 -87 -84 -80 -76 -74
Modulation scheme (Adaptive)	QPSK, QPSK, QAM 16, QAM 64
Antenna port (AU-RE)	N-Type 50 ohm
Subscriber integrated antenna AU antennas	21 dB (19 dB) in 4.9-5.1 GHz band, 10.5° HW, integrated flat panel 60° - 16 dB, Sector 60° horizontal, 10° vertical 90° - 16 dB, Sector 90° horizontal, 0° vertical 120° - 15 dB, Sector 120° horizontal, 0° vertical 300° - 8 dB, Sector 300° horizontal, 9° vertical (AU-SA only)

Data Communication

VLAN support	Based on IEEE 802.1q, QinQ 802.3ad
Layer-2 traffic prioritization	Based on IEEE 802.1p
Layer-3 traffic prioritization	IP ToS, according to RFC791 and DSCP according to RFC2474
Layer-4 traffic prioritization	LSR/TCP port range
Security	WEP 128-bit authentication, AES 128, WEP 128, and certified IPS-197 mode built in encryption

Configuration and Management

Local & remote management	SNMP based MMS and windows based configuration utility, Telnet
Remote management access	From wired LAN, wireless link
Management access protection	Multi-level password Configuration of remote direction (from Ethernet only, wireless only, or both sides) Configuration of IP addresses of authorized stations
Software upgrade	Via TFTP and FTP
Configuration upload/download	Via TFTP and FTP
SNMP agents	SNMP v1 client, MIB II, Bridge MIB, Private BreezeACCESS VLMIB

Physical and Electrical

Type	Electrical
SU-PA	Ethernet: 10/100BaseT Bi-45, 2 embedded LEDs
AU-PA	Radio: 10/100BaseT Ethernet Bi-45
SU-PA	AC IN: 3-pin AC power plug
AU-PE	Indoor: 10/100Base Bi-45 with waterproof sealing assembly
AU-PS	Outdoor: 10/100BaseT Ethernet Bi-45
BS-PS AC (AC power supply)	Power consumption: 30W (module only, outdoor units) AC input: 100-240VAC, 3000Hz 3.3VDC, 5A from power supply in backplane
BS-PS-DC (DC power supply)	Power consumption: 240W, full chassis (1 PS, 6 AU) AC input: 85-265VAC, 47-60Hz DC output: 5A@ 3.3V Power consumption: 240W, full chassis (1 PS, 6 AU) DC input: -48 VDC, nominal (-34 to -72), 10 A max. DC output: 5A@ 3.3V

Standards Compliance

Type	Standard
EMC	FCC Part 15 class B, CE/ETSI EN 301 488-1/4
Safety	UL 60950-1, EN 60950-1
Environmental	Operation: ETS 300 019 part 2-3 class 3.1E for indoor units, ETS 300 019 part 2-4 class 4.1E for outdoor units Storage: ETS 300 019-2-1 class 1.2E, ETS 300 019-2-2 class 2.3
Lightning protection	EN 61000-4-5, class 3 (2kV)
Radio	FCC part 15 EN 301 753 EN 301 021 EN 301 893 (V 1.3.1)

Note: Not all options are available in all regions and some features require software licensing key. Please contact your local representative for further information.

BreezeACCESS® VL

Broadband Wireless Access with Toll Quality Voice



BreezeACCESS VL, Alvarion's broadband wireless platform in the 5 GHz frequency, is part of the BreezeACCESS product family, the world's most deployed wireless broadband platform. Superior features such as non-line-of-sight (NLOS), extended reach, high capacity in all packet sizes, encryption, and end-to-end QoS for time critical applications are key to its success in deployments worldwide.

Increase revenue from offering toll quality voice over IP (VoIP) and other triple play services through the use of quality of service algorithms (QoS), multimedia application prioritization (MAP) for wireless link prioritization, and unprecedented high capacity in all packet sizes. BreezeACCESS VL supports hundreds of simultaneous calls per sector.

With BreezeACCESS VL, operators offer a wide variety of services and applications, including VoIP, wireless leased line, hotspot feeding, gaming services, secure VPNs, video surveillance and wireless xDSL in urban and rural environments, and all at reduced capital and operating costs than wired alternatives.



Choose BreezeACCESS VL for:

- Video and voice with end-to-end quality of service supporting an unmatched number of hundreds of toll quality calls per sector
- Connecting communities - for cost-effective access within communities, municipalities and educational institutions
- Hotspot feeding - high throughput, reliable service
- Security and surveillance - wireless cameras transmitting bandwidth hungry video and requiring secure reliable services
- Last mile access - services for both residential and business users with NLOS capabilities for all environments, rural and urban
- Enterprise networks - leased line replacement for cost effective connectivity, providing VoIP and data services in enterprises and campuses

Reasons for Choosing BreezeACCESS VL

- ### Economic Advantages
- More revenues by providing subscribers toll quality voice and video services with differentiated price packages for multiple speeds and upgrade options
 - Less infrastructure investment today - NLOS, high capacity, outstanding coverage, multi-subscriber priorities in same sector and network, modular and flexible "pay-as-you-grow" enables fewer base stations and site constructions
 - Lower CAPEX tomorrow - protect your investment for co-location with future WiMAX systems. Both sets of CPEs (BreezeACCESS VL and BreezeMAX™) are able to operate at the same sector. Alvarion WiMAX management tool will support all Alvarion WiMAX, BreezeACCESS VL and BreezeNET B™ platforms with seamless management migration
 - Out-of-the-box low cost installation -
 - 10 LEDs SNR BAR display on outdoor unit for fast antenna alignment without external tools or monitors, standard CAT-5 cable and best AU mode for fast association
 - Optimal performance through always-on adaptive modulation and automatic transmit power control (ATPC)
 - Over-the-air software upgrade for easy, cost-saving installation
 - Lower OPEX - fewer base stations, remote management and remote firmware upgrade, effective diagnostic tools, self adaptive to environmental changes

Technological Advantages

- Wide coverage, more customers with fewer base stations
- Multimedia Application Prioritization (MAP) using wireless link prioritization for full end-to-end QoS
- Unique dynamic resource allocation protocol (DRAP) with Alvarion's voice gateways ensuring high quality voice, while maintaining residual capacity for best effort data services
- Very high capacity and packet processing for best network performance and high number of VoIP calls
- DFS+ (dynamic frequency selection) for countries that require it, plus an Alvarion only algorithm to improve channel management under certain conditions of low radar activity
- Best access unit (AU) selection - for fast and simple SU association with best AU detected, also acts as a redundancy mechanism that automatically selects second best AU if best AU fails
- Flexible network planning - Supports 10 and 20 MHz subchannel options for radio planning and interference avoidance with automatic subchannel search
- Rugged, widely deployed robust solution in 5 GHz

Management Advantages

- AlvarionSTAR - a comprehensive network management support tool with scalable architecture, topology management, configuration and monitoring, fault management, and performance monitoring
- BreezeCONFIG - a configuration and monitoring utility that is intuitive and simple to use and enables simultaneous firmware upgrades for multiple CPEs

Extensive Access Suite Features

- Bridging functionality - simple configuration, fast installation
- 802.1Q VLAN support with trunk, access and hybrid and QinQ 802.ad modes
- QoS - end-to-end QoS with MAP using packet prioritization
- SLA enforcement - supports committed information rates (CIR) and maximum information rates (MIR) per user, per direction; packet prioritization with IP TOS, VLAN, DiffServ and UDPTCP port range classification, and graceful degradation in case of congestion

Security and Filtering Options

- AES 128 and WEP 128 encryption options - and new FIPS-197 encryption mode, certified according to Federal Information Processing Standards, confidential list; enabling only authorized CPEs to connect
- Access control with IP address protocol and MAC based filtering, offering better control including being able to limit the number of authorized IP addresses, enabling an additional source of revenue or for preventing local broadcasts from flooding the wireless link

Flexibility and Modularity

- Flexible topology allowing stand-alone or chassis based configurations for modular and scalable solutions enabling "pay as you grow". Deployable in multiple sectors using various antenna choices
- AC and DC power supply options
- Supports 3, 5 and 54 Mbps CPE rates with attached and external antenna options
- Upgradable CPE bandwidth over the air

The Complete Spectrum™ Solution

- Covers the entire 5 GHz band and easily integrates with BreezeACCESS's 900 MHz, 2.4 GHz, 3.5 and 4.9 GHz bands using the same infrastructure and range of technologies
- Supports concurrent LOS, NLOS and multi-frequencies with subscriber speeds from 3 to 54 Mbps
- Permits operators to customize networks for various market segments to achieve the highest revenue per cell

Robustness and Reliability

- Adaptive modulation with 8 rates schemes and smooth changes between rates responding to link conditions, facilitating link robustness, set at the highest per customer rate possible
- Automatic transmit power control (ATPC) - the access unit automatically measures and adjusts the subscriber unit's transmission power, enabling easier installation and optimizing network performance
- Supports various redundancy options
- Built in Forward Error Correction and retransmission correcting lost and damaged bits
- Full outdoor rated equipment option with OPS-AC-HD

System Components

The BreezeACCESS VL solution consists of a base station and customer premises equipment (CPE) units. The base stations are available as either modular or stand-alone micro cell units. CPEs are available in various models for differing bandwidths and single or multiple user configurations.

Access Units (AUs)

Installed at the base station site, each AU includes indoor and outdoor units. The indoor connects to the network through a standard Ethernet 10/100BaseT (RJ-45) interface and to the outdoor unit is connected to the indoor unit through a CAT-5 cable. Alvarion offers two types of base stations:

- The modular shelf base station (BS-SH-VL 19" 3U universal chassis holding up to 6 AU modules. Two power supply modules can be used in a BS-SH-VL chassis (either AC or DC) for fail-safe operation. The AU-D-B5 kit includes a chassis based indoor unit, pole mounted outdoor unit and sector antennas.
- The stand-alone micro base station (AU-D-SA) kit includes a small indoor unit, pole-mounted outdoor unit and a sector antenna.

A variety of antennas can be used with the base station: 360, 120, 90 and 60 degrees.


Subscriber Units (SUs)

The subscriber unit (SU) enables customer connection with the base station and supports single or multiple end users. SUs provide an efficient platform for always-on, high-speed Internet and Intranet, VoIP, VRI and other services.

Each SU connects to the network through a standard Ethernet 10/100BaseT (RJ-45) interface and connects to its outdoor part via CAT-5 cable. Each SU kit includes a single data port indoor unit, CAT-5 indoor-outdoor cable, pole mounted outdoor unit and integrated antenna in most cases. Several subscriber unit add-on modules are available including: the networking gateway that offers residential, SOHO and SME subscribers a flexible range of wireless and wireline networking services and the voice gateway that offers the efficient provision of voice and data.

Several CPE models are available (fi - frequency band):

- The SU-A-fi-3-1D-VL supports gross rate of up to 3 Mbps for a single user, includes integrated antenna
- The SU-A-fi-6-6D-VL supports gross rate of up to 6 Mbps for multiple users, includes integrated antenna
- The SU-A-fi-54-8D-VL supports gross rate of up to 54 Mbps for multiple users, includes integrated antenna
- The SU-E-fi-54-8D-VL supports gross rate of up to 54 Mbps for multiple users, does not include antenna

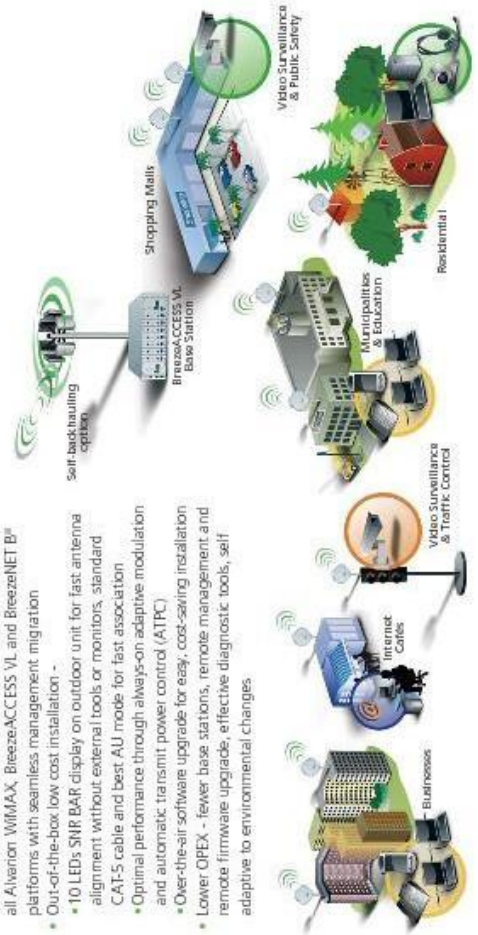

BreezeMAX[®] Wi² BreezeACCESS[®]

**Combined WiMAX[™] and Wi-Fi
end-to-end broadband solutions**

Wi² offers the ultimate IP wireless broadband solution for a variety of applications and services – anytime, anywhere.

Wi² provides the best of both worlds:

- Easy-to-deploy outdoor Wi-Fi mesh access solution integrated with built-in management and OSS support
- Readiness for immediate connection with the robust QoS capabilities of a BreezeMAX/BreezeACCESS backhauling network providing Personal Broadband services

Services delivered with Wi² range from basic public Internet access to public safety, traffic management, video surveillance, indoor coverage and other advanced voice, video and mobile applications.



Deploy mesh networks easily and cost effectively

Answering the need for outdoor Wi-Fi connectivity, WP offers localized mesh networks with a Wi-Fi AP-rich feature set. Furthermore, it enables immediate connection with WiMAX star backhauling networks. This results in a high performance, low complexity, easy-to-deploy network, which can be easily tailored to specific operational and budget demands. Consequently, WP enables operators to work according to their specific needs and enjoy mesh benefits such as self-healing and lower network costs while still maintaining a robust, simple and high QoS network.

Integrate a complete, robust end-to-end solution


WP offers a wide range of important features. These include extensive network management with detailed statistics and diagnostics capabilities for easy evaluation of network performance and behavior; embedded OSS abilities with RADIUS servers, captive portals and accounting information; self-healing; powerful QoS for voice and video support; and extensive security features.

Increase revenue with multiple application network support

Deliver a variety of independent services through the simultaneous operation of up to 16 different virtual networks (16 SSIDs) on the same infrastructure. Each network retains unique QoS, security, authentication, guest access services, management attributes and billing rates, allowing for revenue generation according to customer service level agreements (SLAs).

Key Wi-Fi applications

- Public Internet access
- Voice
- Video surveillance
- Traffic management
- Indoor Wi-Fi coverage
- Outdoor workers
- Public safety
- Homeland security
- Transportation
- Nomadic and mobile applications

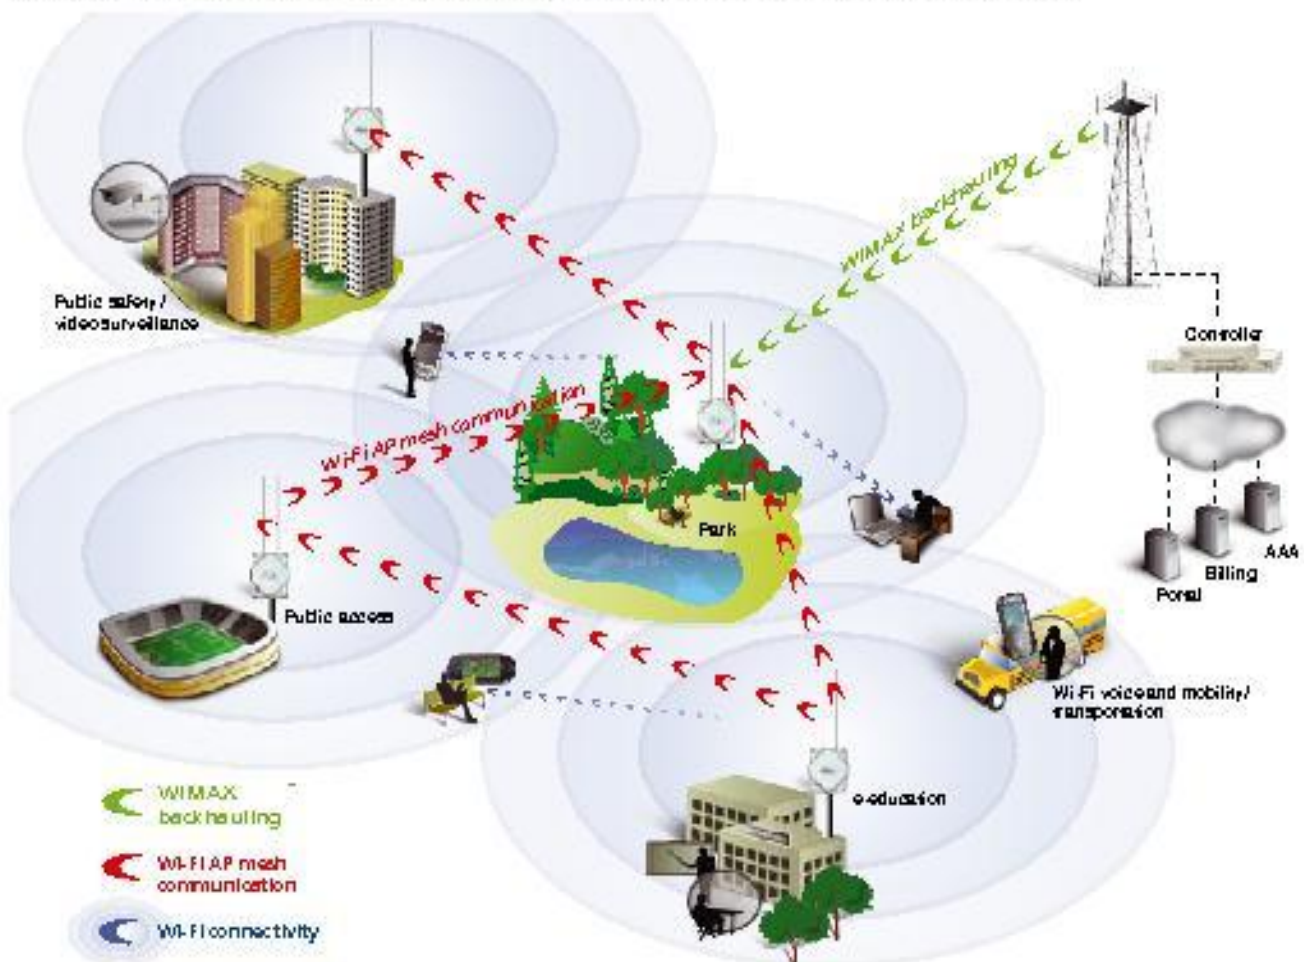

Improve ROI by extending the service offering to Wi-Fi end users

Capture revenues from both Wi-Fi and WiMAX clients – existing wireless IP broadband operators can generate additional revenues from Wi-Fi end users using standard laptops, PDAs and Wi-Fi phones, while leveraging existing WiMAX networks.

Support advanced mobile applications

The roaming and rapid handover support offered by Wi² enables the deployment of advanced mobile applications such as voice networks and transportation, as well as readiness for migration to a complete Mobile WiMAX network.

Reduce costs through easy plug and play installation anywhere, anytime

The Wi² solution can be installed in any rugged outdoor conditions – including roofs, walls and light poles, thereby reducing site installation, acquisition and rental costs. Furthermore, plug and play installation enables operators to literally just connect the units to the power, with authentication, software updates and configuration performed automatically by the Wi² controller.

Support and manage networks with thousands of APs

Wi² is a completely scalable solution which can easily support and manage deployments from tens to thousands of APs. This scalable network architecture enables operators to pay as they grow and minimize risks, without any additional or incremental costs.

Wi² system components

Wi² 	Ruggedized solution which connects to all Alvarion outdoor CPEs, irrespective of frequency Deployment - outdoor Supports Wi-Fi AP 802.11b/g, WiMAX connectivity, security and QoS
Wi² Extender 	Extends Wi-Fi network, uses the same Wi² AP (software and hardware), and includes indoor unit (IDU) for power and connectivity Deployment - outdoor Supports Wi-Fi AP 802.11b/g, security and QoS
Wi² Controller (optional) 	Centralized network management and control (recommended for all deployments), with optional mobility support Deployment - NOC Supports security, QoS, OSS, mobility, plug and play installation and network management (for all APs)
Wi² NMS (optional) 	Manages all controllers in network and provides additional alerts and statistical information Deployment - NOC Supports network management (also for controllers)

Specifications

Headquarters

International Corporate Headquarters
Tel: +972 3 645 6262
Email: corporate-sales@alvarion.com

North America Headquarters
Tel: +1 650 214 2500
Email: northamerica-sales@alvarion.com

Sales Contacts

Australia
Email: australia-sales@alvarion.com

Brazil
Email: brazil-sales@alvarion.com

Canada
Email: canada-sales@alvarion.com

China
Email: china-sales@alvarion.com

Czech Republic
Email: czech-sales@alvarion.com

France
Email: france-sales@alvarion.com

Germany
Email: germany-sales@alvarion.com

Hong Kong
Email: hongkong-sales@alvarion.com

Italy
Email: italy-sales@alvarion.com

Ireland
Email: uk-sales@alvarion.com

Japan
Email: japan-sales@alvarion.com

Latin America
Email: latam-sales@alvarion.com

Mexico
Email: mexico-sales@alvarion.com

Nigeria
Email: nigeria-sales@alvarion.com

Philippines
Email: far-east-sales@alvarion.com

Poland
Email: poland-sales@alvarion.com

Romania
Email: romania-sales@alvarion.com

Russia
Email: info@alvarion.ru

Singapore
Email: far-east-sales@alvarion.com

South Africa
Email: africa-sales@alvarion.com

Spain
Email: spain-sales@alvarion.com

U.K.
Email: uk-sales@alvarion.com

Uruguay
Email: uruguay-sales@alvarion.com

For the latest contact information in your area, please visit:
www.alvarion.com/company/locations



www.alvarion.com

© Copyright 2008 Alvarion Ltd. All rights reserved. Alvarion and all names, product and service names referenced herein are either registered trademarks, trademarks, trade names or service marks of Alvarion Ltd. All other names are or may be the trademarks of their respective owners. The content herein is subject to change without further notice.

Wi-Fi Access Point Specifications

Data Rates
802.11g: 6, 9, 11, 12, 18, 24, 36, 48,
54 Mbps per channel
802.11b: 1, 2, 5.5, 11 Mbps per channel

Maximum Channels
FCC/IC: 1-11
ETSI: 1-13
Japan: 1-14

Maximum Clients
128 for the radio interface set to access point mode

Modulation Types
802.11g: CCK, BPSK, QPSK, OFDM
802.11b: CCK, BPSK, QPSK

Operating Frequency
802.11b/g:
2.4-2.4835 GHz (US, Canada, ETSI)
2.4-2.497 GHz (Japan)

Network Management
Web-management, Telnet, SNMP

Radio Signal Certification
FCC Part 15.247 (2.4 GHz)
EN 300.328, EN 302.893, EN 300.826,
EN 301.489-1, EN 301.489-17
ETSI 300.328; ETS 300.826 (802.11b)

Safety
UL/ULC (CSA60950-1; UL60950-1)
CB (IEC 60950-1)
UL/GS (EN60950-1)

Wireless Radio/Regulatory Certification
ETSI 300.328 (11b/g), 301.489 (DC power)
FCC Part 15C 15.247/15.207 (11b/g),
Wi-Fi, DGT, TELEC, R55210 (Canada)

Electromagnetic Compatibility
CE Class B (EN55022)
CE EN55024
IEC61000-3-2, IEC61000-3-3,
IEC61000-4-2, IEC61000-4-3,
IEC61000-4-4, IEC61000-4-5,
IEC61000-4-6, IEC61000-4-8,
IEC61000-4-11
FCC Class B Part 15
VCCI Class B
ICES-003 (Canada)

Standards
IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX
IEEE 802.11 b, g

Antenna Specifications
2 x 8 dBi Omni directional
(2.4-2.5 GHz)

TX Power and RX Sensitivity

802.11g	6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
TX power (dbm)	20	20	20	20	20	19	19	18
RX sensitivity (dbm)	-95	-93	-87	-84	-80	-77	-73	-70

802.11b	1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
TX power (dbm)	20	20	20	20
RX sensitivity (dbm)	-111	-102	-92	-91

Software Features

Access Control
Integrated HTML login/captive portal
Integrated RADIUS authentication
Configurable min./max. connect speed
Scalable to thousands of users

Centralized Management
Full plug and play AP configuration,
upgrade and control
Centralized system monitor for
thousands of APs
Full, secure GUI configuration and
monitoring

Management
SNMP, CLI, web-based
Selectable RF channel and transmit
power
Packet capture on WLAN or LAN
interface (diagnostics)

Multiservice
Support for 16 virtual networks,
hidden and broadcast SSIDs
Unique SSID, Mac address,
authentication, encryption, VLANs
and QoS

Per-user bandwidth management
User account profiles using embedded/
external AAA
Full virtual AP configuration, including
authentication, DTIM, QoS

Mobility
Full voice quality L2 and L3 mobility
for clients roaming between APs
Service transparency through fast
roaming and handovers

QoS and Other
Support for 802.11i, WMM,
RADIUS, 802.1q, 802.1p,
IP TOS/DSCP
Mesh (DWDS), self-healing, self-
optimizing

Security
802.1x, AES, WPA2, Radius, WEP,
Firewall
SSH/SSL, IPSec encapsulated
SNMP, XML
Wireless MAC/IP filter, NAT, CIDR
Layer-2 wireless client isolation
DHCP: Server, Client, Relay,
Option 82, Rogue AP detection
and prevention

Physical Dimensions

Size (H x W x D)
32.9 x 27.8 x 21.1 cm
(13.0 x 11.0 x 8.3 in)

Weight
7.0 kg (15.4 lbs)

Temperature
Operating: -40 to 60°C (-40 to 140°F)
Storage: -55 to 80°C (-67 to 176°F)

Humidity
5 to 95% (non-condensing)

EMC Compliance (Class B)
FCC Class B (US)
RTTED 1999/5/EC
DGT (Taiwan)

* For backhaul specifications, please see BreezeMAX or BreezeACCESS VL documentation, as appropriate
* For further information, please contact your local Alvarion sales representative



OMNI-Directional Antenna


Omni-8-2.4-SC Kit
P/N 811938

Technical Specifications




Specifications	
Frequency Range	2400MHz – 2485MHz
VSWR	1.5:1
Input Power	25 Watts
Gain	8dBi
Beam width H-plane	360°
Beam width V-plane	13°
Input Impedance	50 ohms
Polarization	Vertical
Termination	With 5ft (1.5m) cable N-type male connector
Mechanical	
Dimensions	20.2 x 0.75 in.
Weight	0.5 lbs
Radom Enclosure	Pultruded UV-Stable Fiberglass
Wind Speed	125 MPH
Wind Load	Lateral Trust: 8 lbs Bending Moment: 6.7 ft-lbs
Equivalent Flat Plate Area	0.09 ft ²
Mounting Base Diameter	1-1/4 in.
Mounting	Surface and Mast Mount Hardware L-Bracket

Elevation Pattern

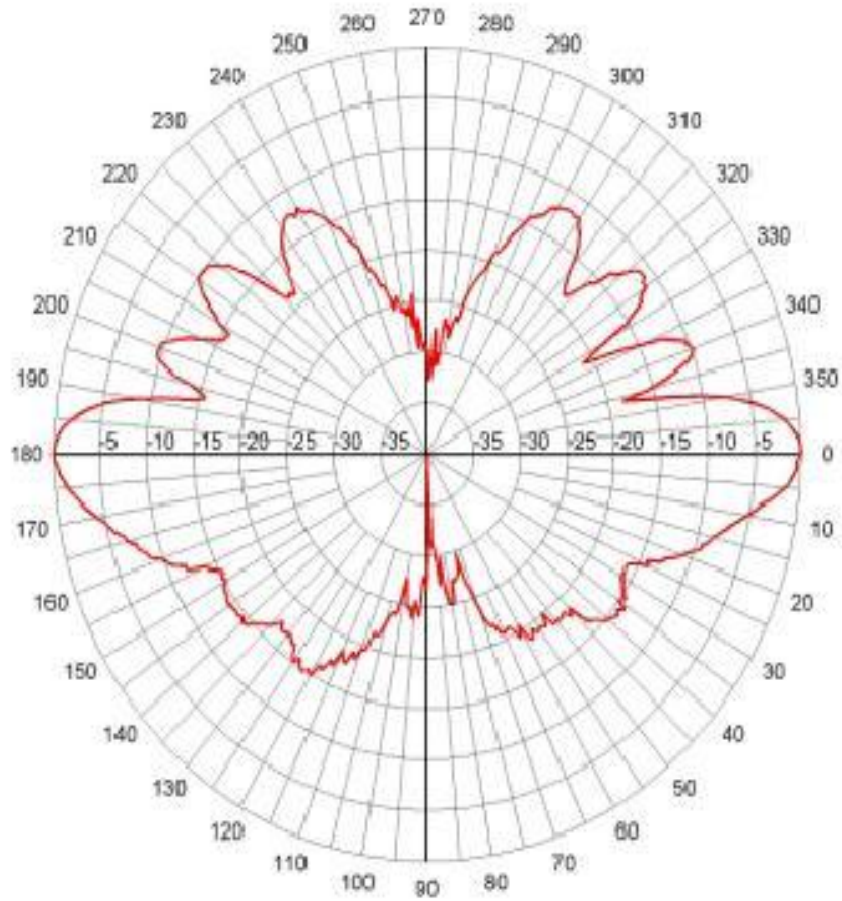

Azimuth Pattern

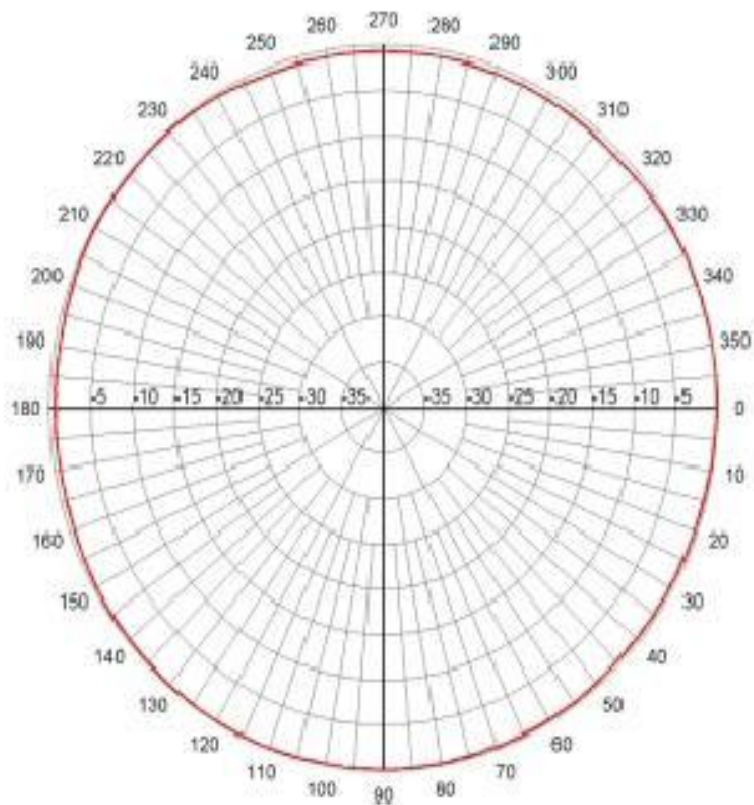

**Gigabit Ethernet for Maximum Performance**

- Connects up to 10x faster than Fast Ethernet for maximum performance†
- Move large files such as multimedia, gaming and Internet access across your network at high speeds
- Fanless design for quiet operation
- Plug-and-play installation delivers ease of use


Features

- Connects up to 5 or 8 devices delivering speeds up to 10x faster than Fast Ethernet†
- Plug-and-play technology
- Dual color LEDs monitor link, speed, and activity
- Supports Fast and Gigabit Ethernet devices with automatic speed-sensing and AutoUplink™ technology
- Supports Windows® and Macintosh® platforms

Upgrading to Gigabit

Five great reasons to upgrade your network with Gigabit!

1. 10x faster than Fast Ethernet—Gigabit Ethernet delivers speeds of up to 1000 Mbps†
2. Significant boost in performance for bandwidth-intensive applications like video conferencing, video streaming, and gaming
3. Eliminates bottlenecks in your network
4. Backward compatible with 10 Mbps and 100 Mbps network devices
5. Affordable prices make it possible for you to join the technological revolution

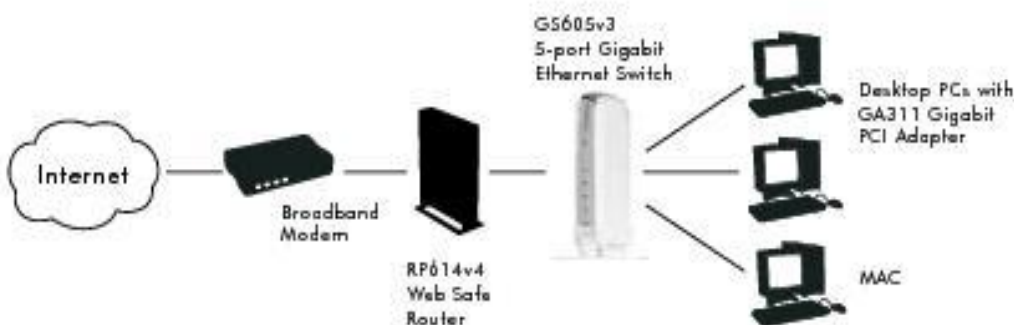**24/7**
TECHNICAL
SUPPORT™

Technical Specifications

- **Network Ports**
 - GS605: 5 auto-speed sensing UTP ports
 - GS608: 8 auto-speed sensing UTP ports
- **Forwarding Mode**
 - Store-and-forward
 - 128K on-chip packet buffering
- **Performance**
 - Bandwidth:
 - GS605: 10 Gbps (non-blocking)
 - GS608: 16 Gbps (non-blocking)
 - Forward Rate (10 Mbps port): 14,800 packets/sec
 - Forward Rate (100 Mbps port): 148,000 packets/sec
 - Forward Rate (1000 Mbps port): 1,480,000 packets/sec
 - Latency @ 10 Mbps - 1250 μ s (max)
 - Latency @ 100 Mbps - 125 μ s (max)
 - Latency @ 1000 Mbps - 15 μ s (max)
 - MAC address database: 4,000
 - Mean time between failures (MTBF): 816,000 hours (9 years)
- **AC Power**
 - 12V AC, 1A; Plug is localized to country of sale
 - GS605: 12W (12V, 1A)
 - GS608: 14.4W (12V, 1.2A)
- **Status LEDs**
 - System power
 - Link, speed and activity indicators for each port
- **Physical Specifications**
 - Dimensions (w x d x h):
 - GS605: 28.6 x 147 x 95.7mm (1.1 x 5.8 x 3.8in)
 - GS608: 31 x 177 x 117mm (1.2 x 7.0 x 4.6in)
 - Weight:
 - GS605: 0.28kg (0.63 lb)
 - GS608: 0.31kg (0.69lb)

Environmental Specifications

- Operating temperature: 0° to 40°C (32° to 104°F)
- Operating humidity: 10% to 90% non-condensing
- Storage temperature: 20° to 70°C (-4° to 158°F)
- Storage humidity: 10% to 95% relative humidity

Standards Compliance

- IEEE 802.3i 10BASE-T Ethernet
- IEEE 802.3u 100BASE-TX Fast Ethernet
- IEEE 802.3ab 1000BASE-T Gigabit Ethernet
- IEEE 802.1p priority tags
- IEEE 802.3x Full-duplex flow control
- Jumbo frame support (9,000 byte frames)

Safety Agency Approvals

- C-Tick, CE Mark

Emissions

- FCC Class B and VCCI Class B, MIC

Warranty

- NETGEAR 2-year Warranty

System Requirements

- 10 Mbps - UTP Cat 3 (or better)
- 100 Mbps - UTP Cat 5 (or better)
- 1000 Mbps - UTP Cat 5e (or better)
- Gigabit Network card for each PC or server (e.g., NETGEAR GA311)
- Windows®, Mac® OS, NetWare™, Linux®

Package Contents

- 5-port and 8-port 10/100/1000 Mbps Gigabit Ethernet Switch (GS605v3 or GS608)
- Vertical stand
- Power adapter
- Installation guide
- Warranty/support information card

NETGEAR Related Products

- Gigabit Ethernet PCI Adapter (GA311)
- Gigabit Ethernet PC Card (GA511)
- 16-port Gigabit Desktop Switch (GS116)

Ordering Information**• GS605**

- North America: GS605NA
- Australia: GS605AU
- Germany: GS605GR
- UK: GS605UK
- France: GS605FS
- Italy: GS605IS
- Eastern Europe: GS605EE

• GS608

- North America: GS608NA
- Australia: GS608AU
- Germany: GS608GR
- UK: GS608UK
- France: GS608FS
- Italy: GS608IS

NETGEAR®

350 E. Plumeria Drive
 San Jose, CA 95134-1911 USA
 1-888-NETGEAR (638-4327)
 E-mail: info@NETGEAR.com
 www.NETGEAR.com

©2008 NETGEAR, Inc. NETGEAR, the NETGEAR logo, NETGEAR Digital Enterprise logo, Connected with Innovation, ProView, IntelliFi, PowerShift, ProSafe, RAIDar, RACiator, XRAID, RangeMax, ReadyNAS and Smart Wizard are trademarks of NETGEAR, Inc. in the United States and/or other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. All rights reserved.

†Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building material and construction, and network overhead, lower actual data throughput rate.